

COMPACT TRACK LOADER

SWTL4538

Engine Power: **73.2 hp/54.6 kW** / Machine Weight: **10,150 lb/4 600 kg** / Rated Operating Capacity: **2,648 lbs/1 200 kg**




TECHNICAL PARAMETERS

SWTL 4538

| | | Imperial | Metric |
|-----------------------------|---|-----------------------------------|-----------------------------------|
| PERFORMANCE | Operating weight | 10,150 lb | 4 600 kg |
| | Rated operating capacity | 2,648 lb | 1200 kg |
| | Tipping load | 7,568 lb | 3 430 kg |
| | Breakout force curl | 7,613 lb | 3 450 kg |
| | Breakout force lift | 5,737 lb | 2 600 kg |
| | Travel speed | 4.8/7 mph | 8/12 km/h |
| DIMENSIONS | Overall dimension (L × W × H) (standard bucket) | 147'0"X79'3"X81'5" | 3 735 × 2 015 × 2 071 mm |
| | A Maximum overall height | 161'8" | 4 110 mm |
| | B Bucket pin height at maximum lift | 126'7" | 3 217 mm |
| | C Height to top of cab | 81'5" | 2 071 mm |
| | D Height to bottom of level bucket | 120'0" | 3 044 mm |
| | E Length without bucket | 116'9" | 2 969 mm |
| | F Length with bucket on ground | 147'0" | 3 750 mm |
| | G Maximum dump angle | 41° | 44 deg |
| | H Dump height | 98'3" | 2 497 mm |
| | J Dump reach | 37'3" | 948 mm |
| | K Rack back angle bucket on the ground | 30° | 30 deg |
| | L Rack back angle at maximum height | 89° | 89 deg |
| | M Track length on the ground | 63'0" | 1 600 mm |
| | P Ground clearance | 9'0" | 228 mm |
| | Q Departure angle | 34° | 34 deg |
| | R Turning radius from center - Coupler | 56'1" | 1 424 mm |
| | S Turning radius from center - Bucket | 91'4" | 2 322 mm |
| | T Turning radius from center - Machine rear | 67'0" | 1 701 mm |
| | U Bumper overhang behind rear axle | 33'7" | 855 mm |
| V Width over track | 59'1" | 1 500 mm | |
| W Bucket width | 79'3" | 2 015 mm | |
| ENGINE | Brand | KUBOTA | KUBOTA |
| | Model | V3307-CR-TE5B | V3307-CR-TE5B |
| | Type | Diesel, 4 cylinders, water cooled | Diesel, 4 cylinders, water cooled |
| | Emission rating | Tier 4 Final | Tier 4 Final |
| | Output | 73.2 hp | 54.6/2 600 kW/rpm |
| | Max torque | 195.5 lb-ft | 265/1 500 N*m/rpm |
| TRACK | Type | Rubber track | Rubber track |
| | Rubber shoe width | 17.72 Inch | 450 mm |
| ELECTRICAL SYSTEM | Starter | 73.2 hp | 12V/3.0 kW |
| | Alternator rating | 195.5 lb-ft | 12V/80A |
| | Battery | 120Ah | 120 Ah |
| HYDRAULIC SYSTEM | Hydraulic flow (standard) | 20 gpm | 89 L/min |
| | Hydraulic flow (high) | 29 gpm | 130 L/min |
| | Max. hydraulic pressure | 21 Mpa | 21 Mpa |
| HYDRAULIC OIL TANK CAPACITY | | 9.0 gal | 34 L |
| FUEL TANK CAPACITY | | 25.1 gal | 95 L |

DIMENSIONS

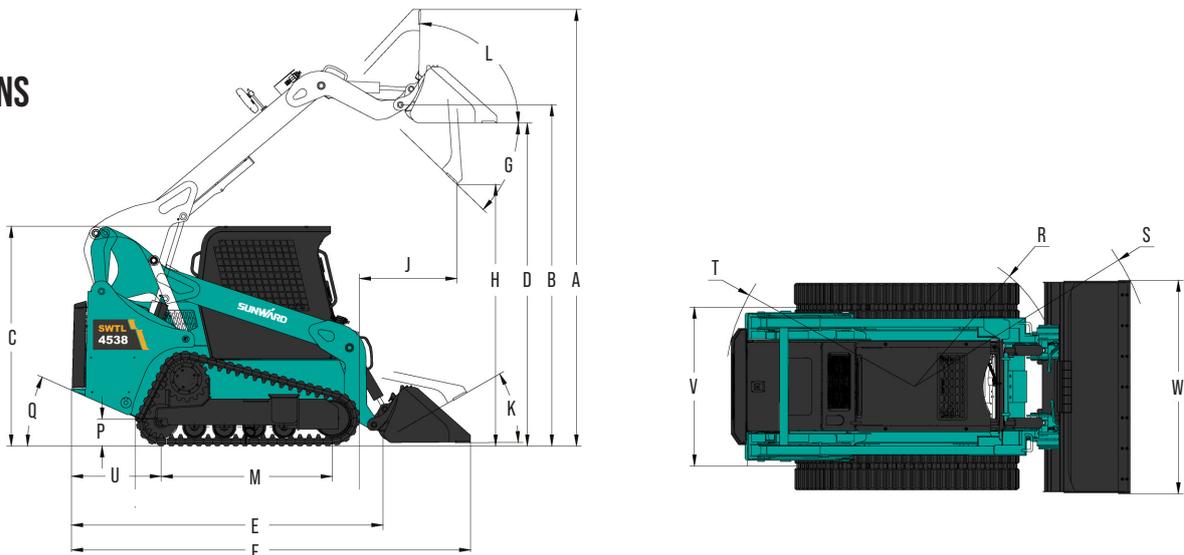

EQUIPMENT

THE STANDARD AND OPTIONAL EQUIPMENT VARIES FROM COUNTRY TO COUNTRY. FOR MORE INFORMATION, PLEASE CONTACT US.

| | | STANDARD EQUIPMENT | OPTIONAL EQUIPMENT |
|--------------------------|--|--------------------|--------------------|
| CAB | FOPS/TOPS cab | • | |
| | Safety armrest | • | |
| | Adjustable seat | • | |
| | Mechanical suspension seat | • | |
| | Centralized panel | • | |
| | Double accelerator control system | • | |
| | Pilot control operating system | • | |
| | Fan heater | • | |
| | Air conditioning | • | |
| Lift cylinder safety bar | • | | |
| FRONT WORKING DEVICES | Standard quick coupler | • | |
| | Standard bucket | • | |
| | Four-in-one bucket | | • |
| | Pallet fork | | • |
| HYDRAULIC SYSTEM | Boom emergency descent | • | |
| | Hydraulic float level system | • | |
| | Closed hydrostatic travelling system | • | |
| | Standard or high flow hydraulic system | • | |
| | Lift cylinder safety bar | • | |
| | 2-speed | • | |
| ELECTRICAL SYSTEM | Front LED working light | • | |
| | Warning beacon light | • | |
| | Travelling alarm system (backward) | • | |
| | Horn | • | |
| | External power supply | | • |
| | Attachment electronic control system | | • |
| | Rear LED working light | | • |
| OTHERS | Additional counter weight | | • |

WORK TOOLS



Sunward America and Sunward Canada

Please check our website for our current list of dealers.



SUNWARD AMERICA CORP

✉ 2710 Geesling Road
Denton, TX 76208

☎ [469] 353-6890

▶ Contact@sunwardamerica.com

🌐 www.sunwardamerica.com

DEALER CONTACTS