

G5-18A AG TELEHANDLER

For the farm where space is at a premium and productivity is a necessity, the G5-18A telehandler delivers the maneuverability and versatility you need to rise above your challenges.



KEY FEATURES

Superior Maneuverability

- Tight turning radius, narrow width and low machine height

Versatility

- Wide variety of attachments to handle an array of challenges

Comfortable Cab

- Spacious cab with single joystick control and 360-degree visibility

Maximized Serviceability

- Easy access to components for service and repair

PERFORMANCE

Rated Capacity	5,500-lb	2,495-kg
Maximum Lift Height	18-ft 4-in	5.6-m
Load at Max Height	4,400-lb	1,996-kg
Maximum Forward Reach	10-ft 11-in	3.3-m
Load at Max Reach	1,850-lb	839-kg
Lift Speed (boom retracted)		
Up	6.8 sec	
Down	4.6 sec	
Boom Speed		
Extended	6.7 sec	
Retracted	3.8 sec	
Top Travel Speed	15 mph	25 kph
Drawbar Pull (loaded)	8,700-lb	3,946-kN
Outside Turning Radius	127-in	3.2-m
Operating Weight	11,000-lb	4,990-kg



STANDARD SPECIFICATIONS

Engine

Make and Model	Deutz TCD 2.9L4	
No. of Cylinders	4	
Displacement	177-cu in	2.9 L
Gross Power Basic	74 hp	55 kW
Maximum Torque	192-lb/ft	260 Nm
Fuel Tank Capacity	24 gal	91 L

Hydraulic System

Capacity	24 gal	91 L
----------	--------	------

Auxiliary hydraulics used for all attachments equipped with cylinders or other hydraulic components. Single-section gear pump.

Transmission

Hydrostatic

Axles

High bias limited slip differential on front axle. Planetary on front and rear axles.

Tires

Standard	12 x 16.5 Pneumatic
Optional	12 x 16.5 Foam-filled
	14 x 17.5 Foam-filled
	14 x 17.5 Pneumatic
	33 x 12 Solid
	33 x 16 Turf


Brakes

Service brakes are inboard wet disc brake on front axle.
Parking brakes are wet disc spring-applied hydraulic release.

Cab

- Adjustable suspension seat
- Certified ROPS/FOPS structure
- Horn

DIMENSIONS & LOAD CHART

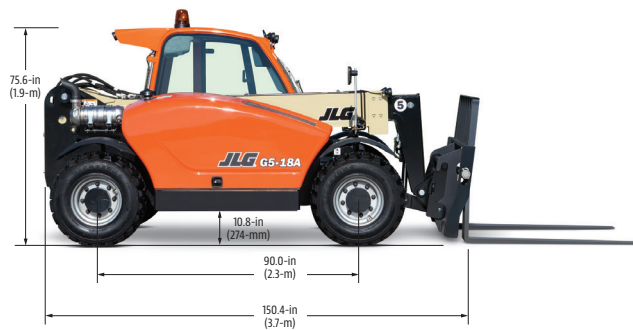


ATTACHMENTS

Dual Bailing Tine Carriage	48-in	1.2-m
Dual Fork Positioning Carriage	48-in	1.2-m
Side Shifting Carriage	48-in	1.2-m
Standard Carriage	50-in	1.3-m
Side-Tilt Carriage	48-in	1.2-m
Pallet Forks	2-in x 4-in x 48-in	51-mm x 102-mm x 1.2-m
Lumber Forks	1.5-in x 6-in x 60-in	38-mm x 152-mm x 1.5-m
Cubing Forks	2 in x 2-in x 48-in	51-mm x 51-mm x 1.2-m
General Purpose Bucket	73-in, 1.0-cu yd	1.85-m, 0.76-m³
Light Material Bucket	72-in, 1.7-cu yd	1.8-m, 1.29-m³
Grapple Bucket	72-in, 1.0-cu yd	1.8-m, 0.76-m³
Lifting Hook		
Coupler Mounted Auger		
Fork Mounted Work Platform		

ACCESSORIES & OPTIONS

- Air Conditioning
- Air Shut Off Valve
- Battery Disconnect Switch
- Block Heater
- Boom Brushes
- Brick Guard
- Enclosed Cab
- Fenders
- Hydraulic Quick Switch
- Molded Floor Mat
- Pre-cleaner
- Rear Auxiliary Hydraulics
- Reverse Sensing
- Reversing Camera System
- Reversing Fan
- Road Light Package
- Skylight/Rear Wiper Package
- Tilt Steering
- Tow Hitch w/automatic pin & trailer plug
- Tow Hitch w/trailer plug
- Universal Skid Steer Coupler
- White Noise Back-up Alarm
- Work Light Package

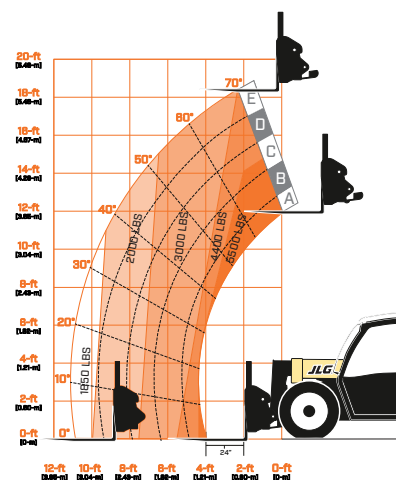

JLG Industries, Inc.

1 JLG Drive
McConnellsburg, PA 17233-9533
Telephone: 717-485-5161 | Toll-free in U.S.: 877-JLG-LIFT
Fax: 717-485-6417
www.jlg.com

An Oshkosh Corporation Company

The JLG "1, 2 & 5" Warranty

We provide coverage for one (1) full year on the entire machine, two (2) full years or 2,000 hours on the drivetrain and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification.

